

มือจ่ายน้ำมัน ZYQ 13A 3/4" และ 1"

AILE® SHANGHAI AILE PETROLEUM EQUIPMENT MFG. CO., LTD.



ZYQ-13A Series Of Automatic Nozzles


► **AILE** ZYQ-13A Automatic nozzles are designed for today's customers' ideals. Small, trim, light weight, easy and convenient to use. It is a rugged performer that offers long life and reliable service.

► **Materials:**

Body: Aluminum
Seals: Buna-N, Viton, Polyurethane
Main stem seals: Viton Cased Oil Seal
Main stem: Stainless steel

► **Package:**

Net Weight: 1.7kg/pc
Gross Weight: 2.0kg/pc
55x34x42.5 cm³/case of 15pc
37.5x34x43 cm³/case of 10pc

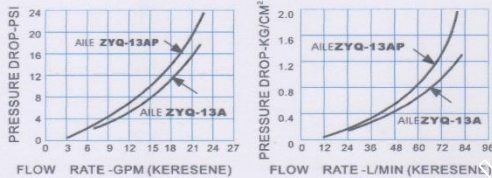

► **Features & Benefits:**

- ◆ **AILE ZYQ-13A** Flow rate: 0-70 L/m (¹⁵/₁₆"³)
- ◆ **AILE ZYQ-13AP** Flow rate: 0-45 L/m (¹³/₁₆"³)
- ◆ **Working Pressure:** 0.18Mpa
- ◆ **Compound Main valve and bleed poppet**
Tight structure, attractive appearance. Minimum pressure Loss and offer a maximum flow rate
- ◆ **Accurate flow control**
It allows customers to top off their tank to the exact amount that they want, and it's easy to stop gasoline flow precisely.
- ◆ **Easily replaced 360° rotation swivel** prevents the hose from curling up.
- ◆ **Hold-open rack is available for full-service applications.** The one hand control means easy setting to flow rate for customer's convenience.
- ◆ **Spout with gear** Making it to be holding on the spout of tank without hand, improving your efficiency.
- ◆ **All nozzles with flow-lock:** designed to shut-off automatically when the spout is tripped up, limiting spillage "spit"
- ◆ **Hand insulator** - protects both nozzle and vehicle, and insulates users' hands.
- ◆ **Available Colors**- color chart on inside back cover
- ◆ **Selective splash guard.**
- ◆ **100% Factory Tested**

► **Ordering Specifications:**

Product #	Inlet size	Outlet diameter	Level and material
ZYQ 13A	NPT3/4" / BSP3/4" / NPT1" / BSP1"	1 1/16"	PA66
ZYQ 13AP	NPT3/4" / BSP3/4" / NPT1" / BSP1"	1 1/16"	PA66
ZYQ 13A-L	NPT3/4" / BSP3/4" / NPT1" / BSP1"	1 1/16"	Aluminum
ZYQ 13AP-L	NPT3/4" / BSP3/4" / NPT1" / BSP1"	1 1/16"	Aluminum


► **Warning:**

Using foreign objects to hold open automatic nozzles could result in failure to shut-off and personal injury.

► **AILE** ZYQ-13A

► **AILE** ZYQ-13AP

► **AILE** ZYQ-13AP-L

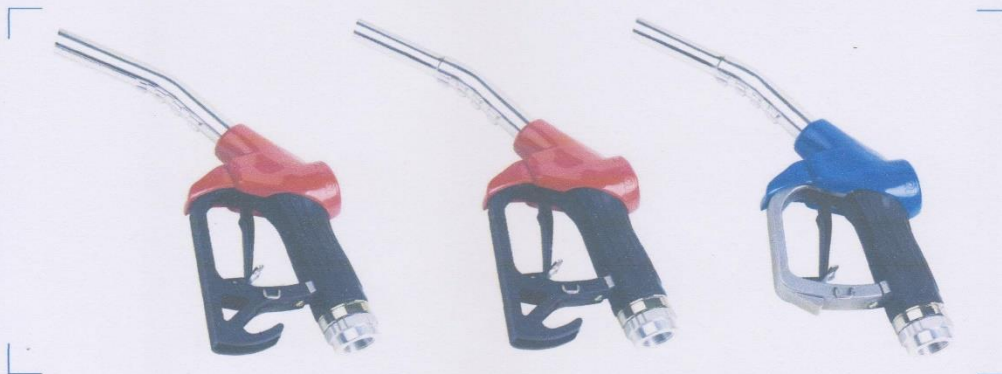

T.02 9267121 T.089 014 3910 srifahshop
 srifahshop@gmail.com www.pumpprogress.com
 เวลาทำการ 08.00 น. - 18.00 น. หยุดเสาร์-อาทิตย์และวันหยุดนักขัตฤกษ์



AILE SHANGHAI AILE PETROLEUM EQUIPMENT MFG.CO.,LTD.

ZYQ-25A Series Of Automatic Nozzles

AILE ZYQ-25A Automatic nozzles are designed for today's customers' ideals. For Heavy-Duty, High-Flow Truck, Scooter, Bus and Fleet Service. Light weight, easy and convenient to use. It is a rugged performer that offers long life and reliable service.

Materials:
Body: Aluminum
Seals: Buna-N, Viton
Main stem seals: Viton Cased O-Ring Seal
Main stem: Stainless steel

Package:
Net Weight: 1.8kg/pc
Gross Weight: 2.0kg/pc
 55x34x32.2cm³/case of 10pc

Ordering Specifications:

Product	Inlet size	Outlet diameter	Lever-Guard materials
ZYQ 25A-801	NPT1" male	1 3/16"	PA66
ZYQ 25A-802	NPT1" Female	1 3/16"	PA66
ZYQ 25A-803	BSPT1" male	1 3/16"	PA66
ZYQ 25A-804	BSPT1" Female	1 3/16"	PA66
ZYQ 25A-805	BSPP1" male	1 3/16"	PA66
ZYQ 25A-806	BSPP1" Female	1 3/16"	PA66
ZYQ 25A-L-821	NPT1" male	1 3/16"	Aluminum
ZYQ 25A-L-822	NPT1" Female	1 3/16"	Aluminum
ZYQ 25A-L-823	BSPT1" male	1 3/16"	Aluminum
ZYQ 25A-L-824	BSPT1" Female	1 3/16"	Aluminum
ZYQ 25A-L-825	BSPP1" male	1 3/16"	Aluminum
ZYQ 25A-L-826	BSPP1" Female	1 3/16"	Aluminum


Features & Benefits:

- ◆ **AILE** ZYQ-25A Flow rate: 0-120L/m(1 3/16")
- ◆ **Working Pressure:** 0.18Mpa
- ◆ **Compound Main valve and bleed poppet**
Tight structure, attractive appearance. Minimum pressure Loss and offer a maximum flow rate
- ◆ **Accurate flow control-**
It allows customers to top off their tank to the exact amount that they want, and it's easy to stop gasoline flow precisely.
- ◆ **Easily replaced 360° rotation swivel-** prevents the hose from curling up.
- ◆ **Hold-open rack is available for full-** service applications. The one hand control means easy setting to flow rate for customer's convenience.
- ◆ **Spout with gear:** Making it to be holding on the spout of tank without hand, improving your efficiency.
- ◆ **All nozzles with Flow-lock:** designed to shut-off automatically when the spout is tripped up, limiting spillage "spit".
- ◆ **Hand insulator-** protects both nozzle and vehicle, and insulates users' hands.
- ◆ **100% Factory Tested**

Replacement Parts:

Key	Description	ZYQ-25A
1	Spout 1 3/16"	
2	Hand Insulator	◆
3	Lever-Guard	◆
4	Lever Assembly	◆
5	Diaphragm Assembly	◆
6	Vac Cap	◆
7	Main Valve	◆
8	Swivel BSP 1"/NPT1"	◆

AILE ZYQ-25A

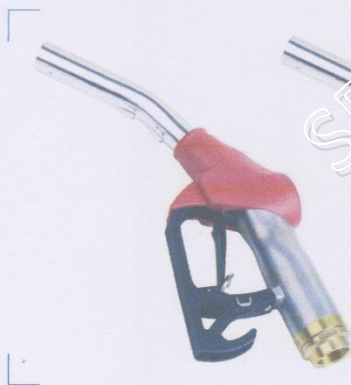

AILE ZYQ-25A-L



AILE ZYQ-25A Nozzle Shown

