

HUSKY SAFE-T-BREAK® VALVES

VAPOR RECOVERY

BALANCE VAPOR RECOVERY

All Husky Safe-T-Breaks® stop the flow of fuel on both sides of the separation and have passed the demanding UL test requirements on separations without leaking or failing.

Model 3360VR

- Reconnectable Safe-T-Break® for balance vapor recovery systems - coaxial hoses with fuel on the “inside”, vapor return on the “outside”.
- Unique in-line latching mechanism requires less force to reconnect Safe-T-Break® after a separation.
- Built-in vapor valve stops vapors from escaping after separation.
- Separates at less than 200 lbf / 889.6 N to minimize backlash damage.
- Patented wave spring design minimizes nuisance breaks

Model 5900

- Non-reconnectable Safe-T-Break® for balance vapor recovery systems - coaxial hoses with fuel on the “inside”, vapor return on the “outside”.
- Internal pressure compensating chamber isolates shear pin from line shock preventing nuisance breaks.
- Separates at less than 250 lbf / 1112.1 N to minimize backlash damage.
- Same built-in vapor valve as the 3360VR.

SPECIFYING INFORMATION



Model Number	Description	Weight lbs (kg)
3360VR	Reconnectable	1.24 (.56)
5900	Non-Reconnectable	1.2 (.54)

CONSTRUCTION

Body	Aluminum
Seals	Viton® (Fluorocarbon)
Springs	Stainless Steel
Threads	1-7/8” x 12
Stainless steel load and latch spring reverse mechanism	
Hardened stainless steel latch ring and balls	

PATENTS and LISTINGS

Patent Numbers: 3360VR = 4,827,977
5900 = Pending

Listings: 3360VR =  
CARB E.O. #G-70-196

5900 =  




Model #3360VR



Model #5900



MADE IN THE U.S.A.

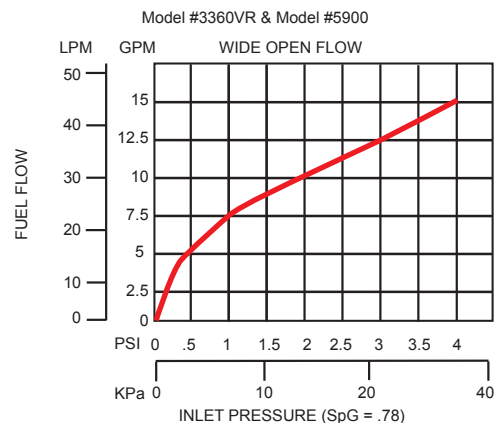

HUSKY SAFE-T-BREAK® VALVES

BALANCE VAPOR RECOVERY

- **Dimensions**
- **Accessories**

Safe-T-Breaks®	
Model No.	Description
2715	10 in / 254 mm Coaxial Whip Hose
3360VR-333	Reconnectable Safe-T-Break® connected to Model #2715 Coaxial Whip Hose
3990	Scuff Guard for 3360VR Safe-T-Break®
5895	Scuff Guard for 5900 Safe-T-Break®

